






## 2017 – 2023 L5P Duramax ECM Upgrade Instructions

1. Download the latest version of the HP Tuners VCM Suite (beta) – **MUST BE UPDATED AT THE TIME OF THE UPGRADE AND MUST BE THE BETA VERSION**
  - a. <https://www.hptuners.com/downloads/>
  - b. If this is your first time downloading the beta or if it has not been updated recently, you HAVE to download the .NET Desktop Runtime update below the BETA download  
**NOTE:** For 2019-2023 Trucks, the unlock cable is not needed. Skip to Step 7.
2. With the truck turned off, open the hood of the truck and remove the fuse box lid
3. **Remove** the ECM Power Fuse #57 (15A 3 Blade Fuse)
4. **Plug** the cable fuse plug in to the removed fuse slot (SEE IMAGES BELOW)  
- **Red** wire in the middle slot, **White** wire closest slot to the firewall
5. **Feed** the fuse wire through the driver door and connect to the Upgrade Box.
6. **Connect** the HPTNet Cable (gray OR black cable) to the Upgrade Box and your MPVI3 Device
7. **Plug** the MPVI3 in to the OBDII port and turn the truck to the on position
8. **Open** the VCM Editor (Beta) – If a Beta message does not appear, return to step 1
9. **Go** to the **HELP** tab and down to **RESYNC INTERFACE**
  - a. if credits were added, they will sync to the MPVI3 at this time
10. Once the interface has been resynced, **select** the read vehicle icon 
11. Select **READ** in the Vehicle Reader window  
**NOTE: 2020-2023 Vehicles** – Make sure to select do not read under the T93 TCM option
12. Select **READ** again to begin the process
13. An UPGRADE REQUIRED warning window will appear **select OK**
14. The editor will then proceed to read the ECM, a second message will appear, **select OK**
15. **SAVE** this file to your desktop as STOCK READ
  - a. This file will need to be emailed to [info@runvse.com](mailto:info@runvse.com) in order to receive your power tune (Include in the Subject line your order number.)
16. Once saved, you will be able to select the Write Vehicle icon 
17. A licensing window will appear, **select** Show License Options

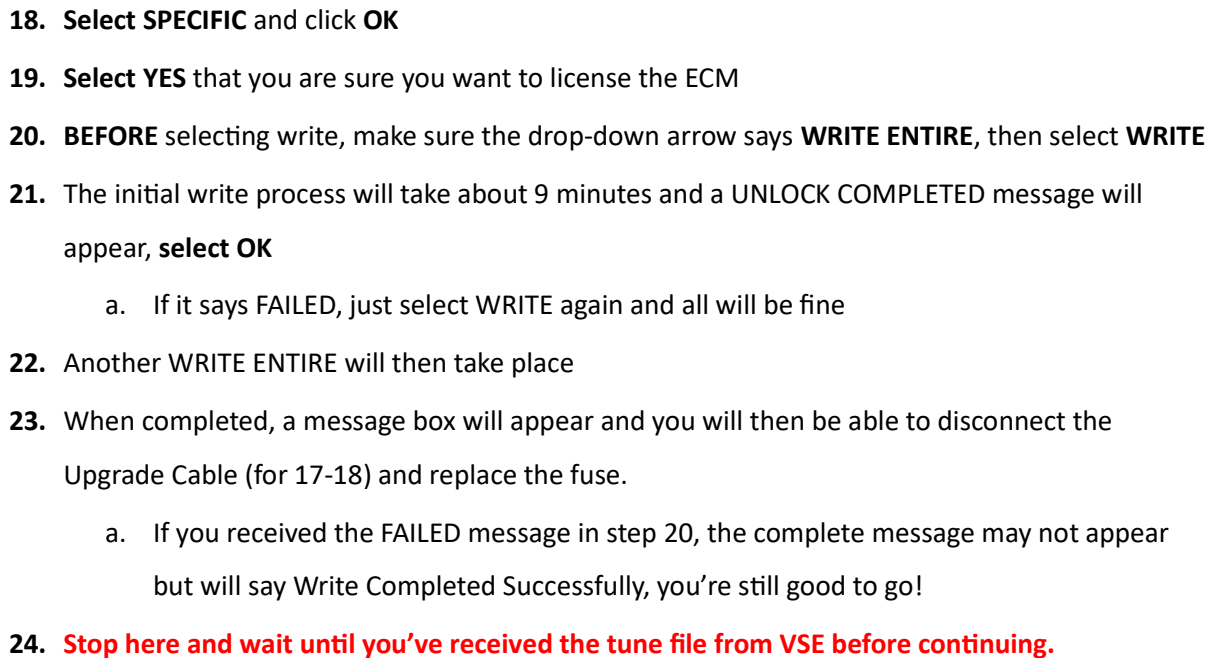


2017 - 2019

FIREWALL ↓

9A15



## Power Tune Flash Instructions

1. Once you receive the tune file back from VSE, **save or download** the file to your computer in a place where you can locate it
2. **Open** the VCM Editor (BETA)
3. **Plug** the MPVI in to the OBDII port and plug the USB cable in
4. Place the truck in the **ON position**
  - a. **Key Start** | turn the key to the accessory position
  - b. **Button Start** | press the start button with your foot off the brake for 8-10 seconds
5. **Open** the tune file by double clicking the file or going to **FILE, OPEN** and then locating the file
6. Once the file is open, the Write Vehicle will show 
7. **Select the icon**, a VEHICLE WRITER window will open
8. Ensure it says WRITE ENTIRE in the drop down menu, then select **WRITE**
  - a. You will not need to license the vehicle again, as we already have during the unlock process
  - b. If you receive the licensing menu, ensure the truck starts, if it does not, open the stock read you took during the unlock and write as if it's the power file.
9. This flash process will take 7-9 minutes to complete and say **WRITE COMPLETED**
10. You can now **start** the vehicle