



VSE 3.0L LM2 / LZ0 Duramax Turbo Pre-Install Instructions

Prior to installation, inspect turbo for possible damage during shipping and make sure the compressor wheel is free spinning. Ensure clamps and bolts have not backed out. Contact customer service if any damage is found.

1. Locate the Oil Inlet (pictured below)

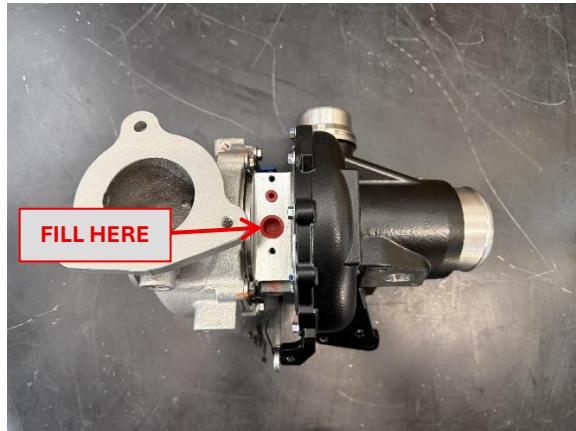

2. Using clean engine oil, fill the inlet to the top of the threads
3. Rotate the exhaust turbine for 30 seconds to allow the oil to spread evenly through the bearings.

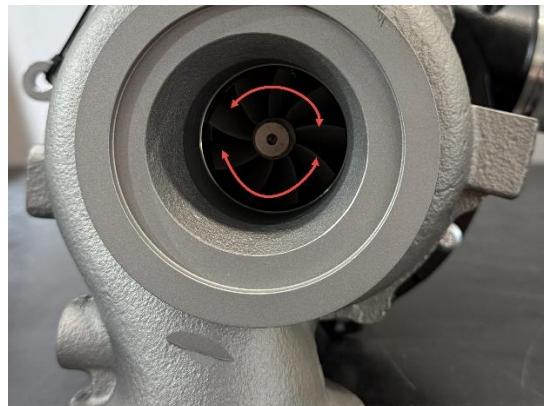

4. The turbo is now prepped for installation

[GM LM2 TURBO REMOVAL AND REPLACEMENT
INSTRUCTIONS](#)

[GM LZ0 TURBO REMOVAL AND REPLACEMENT
INSTRUCTIONS](#)

[GM LM2 / LZ0 ACTUATOR REPLACEMENT INSTRUCTIONS](#)

[GM LM2 VGT RELEARN PROCEDURE](#)

[GM LZ0 VGT RELEARN PROCEDURE](#)